




ErP CE

h 720



PIPES: 13

h 920




PIPES: 18

h 1375



PIPES: 27


h 1703

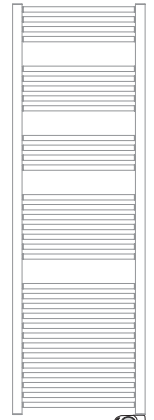

PIPES: 33

	straight
Material	carbon steel
Pipes - Ø	22x0,9
Collectors - mm	30x40x1,5
Wall fixings	3
Max temperature	90 °C
Paint	epoxypolyester powder
Packaging	styrofoam protections + carton box + external nylon shrink wrap
Protection rate	IP24
Electrical insulation	Class 2
Heating element protection systems	Overtemperature cut/out

Standard equipment: 1 kit wall fixing brackets

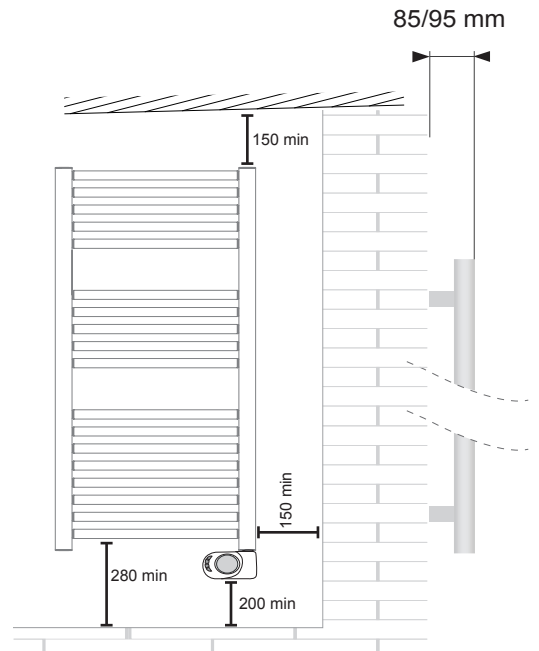


White RAL 9016 - straight

code	h mm	width mm	weight kg	heating element watt	heating element kcal/h	heating element btu	overtemperature °C
388166	720	400	7,7	300	258	1024	105
388167	920	480	9,4	500	430	1706	105
388168	1375	480	14,7	750	649	2559	105
388169	1703	550	22,1	1000	860	3412	105

Chrome - straight

code	h mm	width mm	weight kg	heating element watt	heating element kcal/h	heating element btu	overtemperature °C
388533	720	400	7,7	150	129	512	100
388534	920	480	9,4	300	258	1024	105
388535	1375	480	14,7	450	387	1535	105
388536	1703	550	22,1	600	516	2047	105

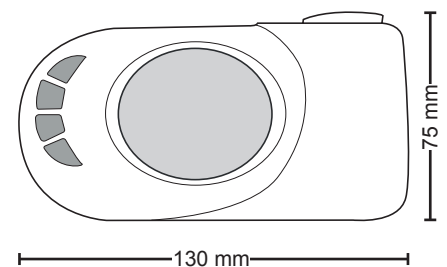

MAIN FUNCTIONS OF THE DIGITAL THERMOSTAT

