




ZODIAC

Ambient Sirocco



Heating · E-shop

Ambient console



- Easy to install, on the pool hall wall (at least 2 m from the pool)
- Available with 3 capacities (2.3 to 4.6 l/hr)
- “Air heating” option (added electricity or hot water battery)
- New HYGRO CONTROL box



	Sirocco ambient 55 single phase	Sirocco ambient 80 single phase	Sirocco ambient 110 single phase	Sirocco ambient 110 three phase
Standard model	W28SI55A	W28SI80A	W28SI110A	W28SI110AT
Model with added electricity option	W28SI55AE	W28SI80AE	W28SI110AE	W28SI110AET
	2 kW	3 kW	4,5 kW	4,5 kW
Model with hot water battery option	W28SI55AB	W28SI80AB	W28SI110AB	W28SI110ABT
	6 kW	9 kW	12 kW	12 kW

Technical specifications	Sirocco ambient 55 single phase	Sirocco ambient 80 single phase	Sirocco ambient 110 single phase	Sirocco ambient 110 three phase
Capacity in l/hr	2,3	3,3	4,6	4,6
Absorbed power (W)**	990	1 100	1 340	1 340
Operating power (W)**	2 080	2 310	2 810	2 810
Air flow (m ³ / h)	600	800	1 000	1 000
Acoustic power (dBA)***	67,7	66,7	66,2	66,2
Acoustic pressure at 5 m (dBA)***	45,7	44,7	44,2	44,2
Electric power supply	Single phase 230 V	Single phase 230 V	Single phase 230 V	Three phase 400 V
Absorbed intensity (A)	4,45	5,05	6,35	2,7
Refrigerating fluid	R407C			
Evacuation of condensation	Flexible Ø 16 duct			
Weight (kg) standard model with no options	65	86	100	100

** in the following nominal conditions: air 30°C, humidity 70 %

*** Values measured and certified in compliance to EN ISO 3741 and EN ISO 354 standards by the CTTM (Centre de Transfert de Technologie du Mans).

Battery specifications	Sirocco 55	Sirocco 80	Sirocco 110
Power (kW) with primary at 80/60°C	6	9	12
Power (kW) with primary at 45/40°C	1,8	2,7	3,6
Water flow (m ³ /hr)	0,25	0,42	0,53
Load loss (mCE)	0,41	0,37	0,65
Connection (mm)	15 / 21 male	15 / 21 male	15 / 21 male

	Sirocco ambient 55 filter	Sirocco ambient 80 filter	Sirocco ambient 110 filter
Accessories	WSD01913	WSD01914	WSD01915

ZPCE advice: For optimal operation of the dehumidifier we recommend you change the filter every year.




INSTALLATION

Dehumidifying console for installation in the area to be treated at least at 2 metres from the pool. The heating can be included as an option: either by hot water battery or by electric heating.





Heating · E-shop

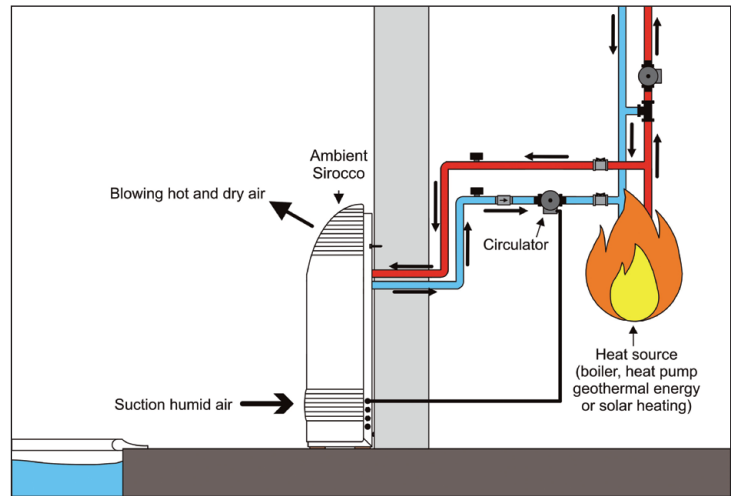

Hydro control box (supplied with the appliance depending on availability dates)

SIZE (in mm)

A	Sirocco 55	Sirocco 80	Sirocco 110
	1030 mm	1220 mm	1410 mm

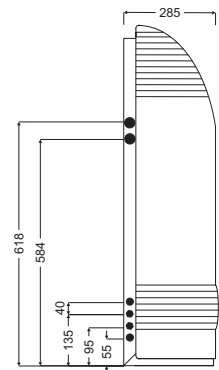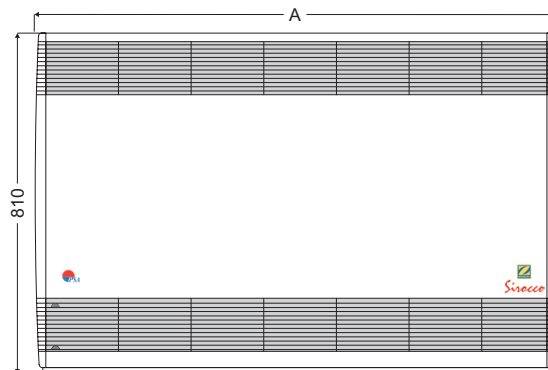

DESCRIPTION

- ABS and plastic coated metal casing.
- Refrigerating fluid: R407C.

